
NILE SERIES | PUSUNG SERIES | DIY KIT SERIES | POLO SERIES | RV POWER SUPPLY SERIES | SMALL HIGH VOLTAGEHOME SERIES | INDUSTRUAL AND COMMERCIAL SERIES

51.2V280Ah

51.2V314Ah



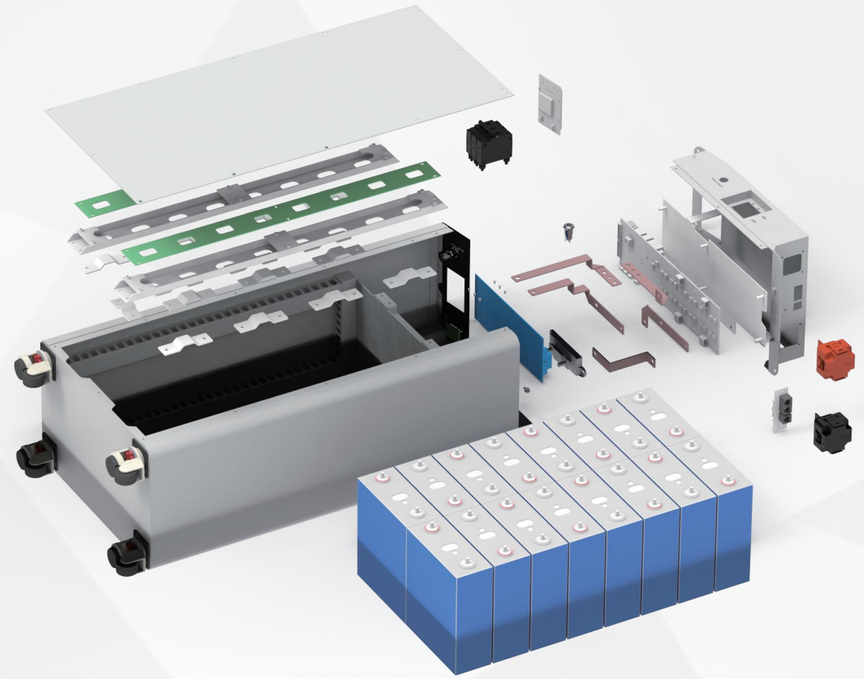

Technical Parameters

PRODUCT PERFORMANCE	RIMDIN-280
STANDARD VOLTAGE	51.2V
RATED CAPACITY	280AH 314Ah
OPERATING VOLTAGE	42V-58.4V
STANDARD CHARGING CURRENT	100A/200A
MAXIMUM CHARGE/DISCHARGE CURRENT	200A
OPERATING TEMPERATURE RANGE	0-40°C(CHARGE)-20-40°C(DISCHARGE)
STORAGE TEMPERATURE	-10°C~35°C (1MONTH) 25±2°C (3MONTH) 65%±20%RH
CYCLE LIFE	8000 CYCLES @25°C 50A CHARGE AND DISCHARGE CURRENT 70% STANDARD CAPACITY 80% DOD
COMMUNICATION	CAN&RS485
WATERPROOF GRADE	IP20
HUMIDITY RANGE	5~95%
NET SIZE	898.5*415*260MM
NET WEIGHT	120±3KG